

ASSA ABLOY

Pyropanel Pyrosill

DESCRIPTION

An aluminium floor mounted threshold seal incorporating a silicone-based seal that reduces the passage of sound and smoke.

APPLICATIONS

Commercial and domestic applications requiring a high performance acoustic and smoke seal. Has been tested with Pyropanel Acoustic doors for up to 47 Rw acoustic resistance with other seals (refer AS-SPECIAL-A).

FEATURES

- Slimline design - only 12.5mm high
- Replaceable rubber seal
- Easy to install


CLEARANCES

Max clearance under door before installing Pyrosill = 8mm

Min clearance under door before installing Pyrosill = 4mm

Max clearance under door to Pyrosill = 5mm


Min clearance under door to Pyrosill = 1mm

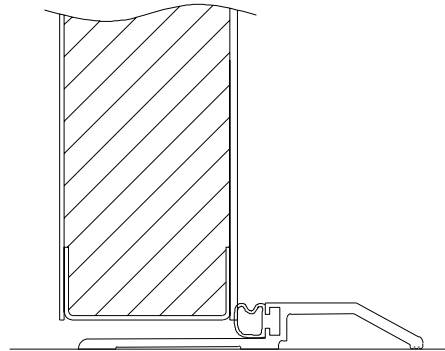

Example of Pyrosill installed at base of Pyropanel AS-SPECIAL-A acoustic door

HOW TO SPECIFY

"Door seal to be a Pyropanel Pyrosill acoustic & smoke threshold seal..."

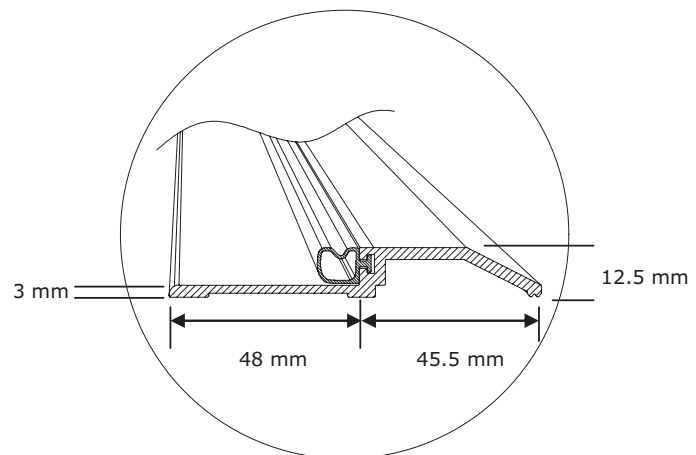

ASSA ABLOY Australia Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166

Ph: **(03) 9837 8500**

Email: sales@pyropanel.com.au

Web: www.pyropanel.com.au

Distributed by:

Solwest Doors

Ph: **(08) 9309 3899**

Email: sales@solwest.com.au

Web: www.solwest.com.au

SOLWEST
DOORS