

# ASSA ABLOY

## Fire Rated Vision Panels

### DESCRIPTION

Vision panels utilising Pilkington Pyrodur™, or Pyroceram glass or up to 2 hours of fire rating.

### APPLICATIONS


Fire doors located in car parks, factories, schools, hospitals or wherever there is a need to see through a fire door. *Not Australian Standards 1530.4 and 1905.1 limit visible area of glass that has an insulation value less than 30 minutes to maximum area 65,000mm<sup>2</sup> when used in fire doors.*

### FEATURES

- Fully certified to Australian Standards
- 13mm Pilkington Pyrodur glass
  - Perfectly clear glass
  - Up to 2 hr fire rating
  - Acoustically rated to 38 Rw
- 5mm Pyroceram ceramic glass
  - Slight bronze colour in appearance
  - Up to 2 hr fire rated
- Standard sizes:
  - 300 x 200mm (nom.),
  - 600 x 100mm (nom.),
  - 250mm (nom.) diameter port-hole (only available with 5mm Pyroceram glass)

### OPTIONAL EXTRAS

- For vision panels greater than 65,000mm<sup>2</sup> visible area, please refer to "Glass fire doors" within the Fire Door section.

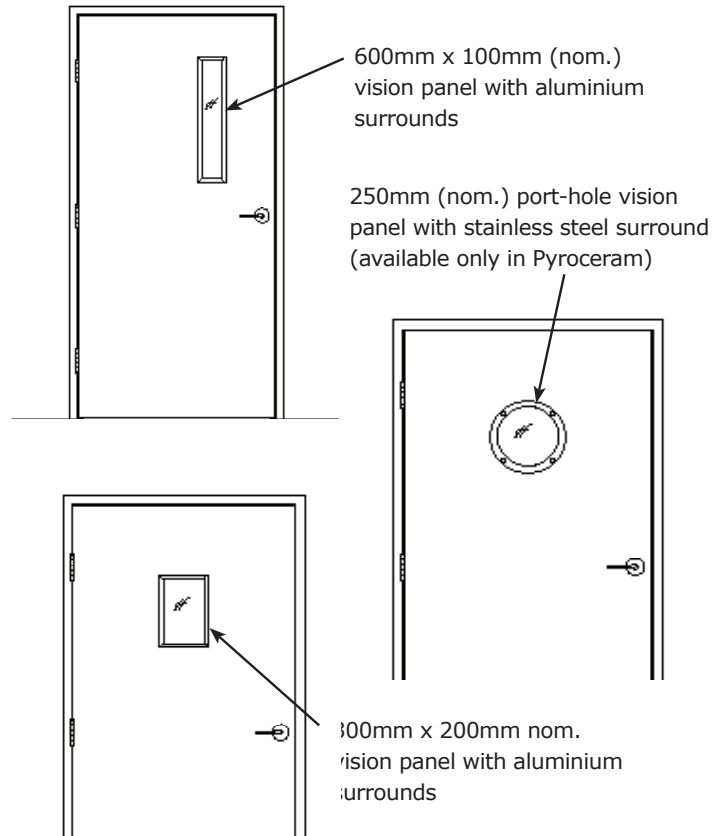

### HOW TO SPECIFY

Eg, "Door to have 600 x 100mm (nom)\* Pyropanel PVP-Pyrodur\* vision panel including surrounds..."

\* denotes example - delete or change or specify as required

### GLASS DATA

Model	Maximum fire rating	Glass	Light transmission	Thickness	Acoustic rating (Rw)	Maximum Visible area
PVP-Pyrodur	2hr	Pyrodur™	85%	13mm	38	65,000mm <sup>2</sup>
PVP-Pyroceram	2hr	Pyroceram™	65% (approx)	5mm	-	65,000mm <sup>2</sup>

**ASSA ABLOY Australia Pty Ltd**  
 235 Huntingdale Road, Oakleigh, Vic 3166  
 Ph: **(03) 9837 8500**  
 Email: [sales@pyropanel.com.au](mailto:sales@pyropanel.com.au)  
 Web: [www.pyropanel.com.au](http://www.pyropanel.com.au)

**Distributed by:**  
**Solwest Doors**  
 Ph: **(08) 9309 3899**  
 Email: [sales@solwest.com.au](mailto:sales@solwest.com.au)  
 Web: [www.solwest.com.au](http://www.solwest.com.au)

