


# ASSA ABLOY

## Fire rated Meeting Stile



### DESCRIPTION

Fire rated meeting stiles suitable for Pyropanel pair fire doors for up to 2 hours of fire rating.

**Detail A**

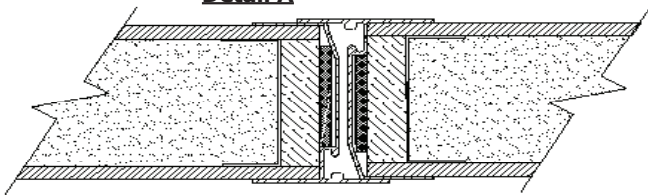

**Detail B**

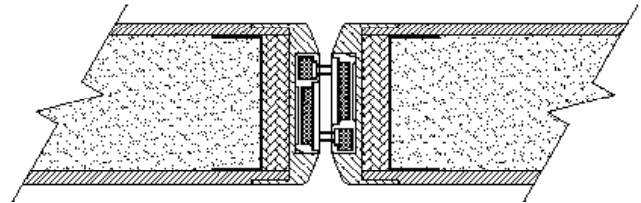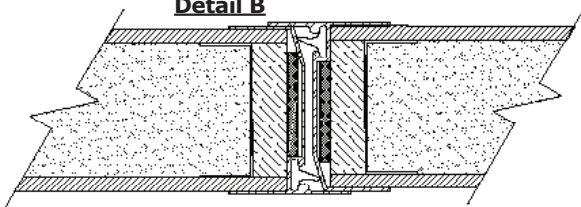


### Pyropanel Aluminium Bull-nose meeting stile (Up to 2 hours of fire rating)

Meeting stile of anodised aluminium suitable for single-acting and double-acting fire doors. Meeting stile incorporates an intumescent seal with fin smoke seals.

### Pyropanel Aluminium J-Section meeting stile (Up to 2 hours of fire rating)

Standard meeting stile of anodised aluminium interlocking J-Section fitted to each leaf. Note: No fin seal required for fire rated applications as per Detail A.

For smoke sealing applications for 1hr, Pyropanel fin smoke seals are used in each meeting stile grooves as per Detail B.

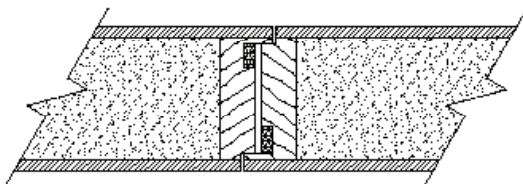

### Pyropanel Timber Double-Rebated meeting stile (Up to 1 hour of fire rating)

Timber meeting stile with double-rebated detail and integrated hot smoke seals. Maximum approved pair doors limited to: 2420 x 1020/1020mm or 2200 x 1120/1120mm.

#### ASSA ABLOY Australia Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166

Ph: (03) 9837 8500

Email: [sales@pyropanel.com.au](mailto:sales@pyropanel.com.au)

Web: [www.pyropanel.com.au](http://www.pyropanel.com.au)

#### Distributed by:

**Solwest Doors**

Ph: (08) 9309 3899

Email: [sales@solwest.com.au](mailto:sales@solwest.com.au)

Web: [www.solwest.com.au](http://www.solwest.com.au)

