

ASSA ABLOY

PY-BSI Bottom Seal (Smoke/Acoustic)

DESCRIPTION

A high performance automatic bottom seal that is fully-morticed in the bottom of the door leaf, which provides protection against smoke and sound transmission.


APPLICATIONS

Unit entry doors, offices, schools, hotels, hostels, nursing homes, hospitals, factories or any application that requires protection against smoke/ sound transmission.

FEATURES

- Acoustic Rating: up to 40 Rw.
- Smoke: meets NCC requirements for a "smoke door". (Not tested to AS1530.7).
- Not visible when door is closed.
- Suits gaps between 6-13mm.
- Provides excellent acoustic performance.
- Provides a level of intruder protection by resisting upward movement of seal when door is in closed position.

Model	Door Width
PY-BSI-0820	820
PY-BSI-0920	920
PY-BSI-1020	1020
PY-BSI-1200	1200

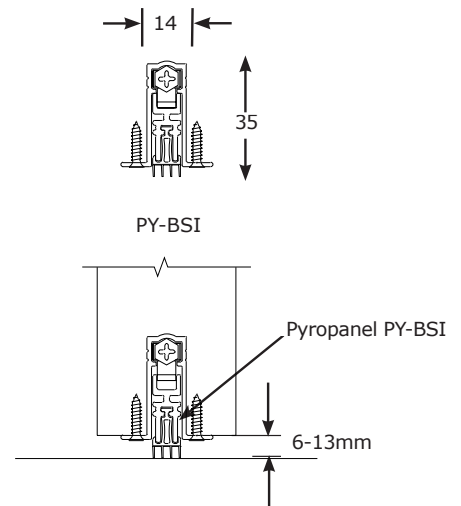

HOW TO SPECIFY

Eg, Bottom door seal to be a Pyropanel PY-BS1-0920.*

**Denotes example - delete or change or specify as required.*

ASSA ABLOY Australia Pty Ltd

235 Huntingdale Road, Oakleigh, Vic 3166

Ph: **(03) 9837 8500**

Email: sales@pyropanel.com.au

Web: www.pyropanel.com.au

Distributed by:

Solwest Doors

Ph: **(08) 9309 3899**

Email: sales@solwest.com.au

Web: www.solwest.com.au

