

DOOR-IN-DOOR WITH FIXED SECURITY SCREEN - 43MM

DESCRIPTION

The Secure Door-In-Door is a metal clad door with a security mesh fitted to the exterior of primary panel. The smaller auxiliary door can be opened for additional light and ventilation whilst primary door remains locked and secure. The doors are individually serialised with QR code for traceability and Solwest can provide shop floor QA/QC reporting.

APPLICATIONS

Ideal for Mining Camps & Personnel access door to sheds / warehouses

CONSTRUCTION

The primary and auxiliary doors are manufactured using an internal timber frame with a combination of HMR Particleboard and Expanded Polystyrene infill. Consideration is given for termite resistance with H3 LOSP treated pine used for bottom rail, this is then enclosed with a 0.55mm Colorbond® flashing.

The doors are clad both sides with 0.55mm Colorbond® steel before an aluminium extrusion is fitted to the perimeter of primary & secondary panels. The auxiliary door frame is a proprietary pressed steel frame fixed to the primary leaf, and is fitted with Kilargo IS1515 (or equivalent) for dust and weather protection.

The auxiliary door is secured via a turn-snob lock with handle. The primary door can be machined to receive a lockset of client's choosing - from lever set to a RFID mortise lockset.

Available in a range of made to order sizes and Colorbond® colours.

Construction of the door has been tested in a NATA approved testing facility and complies with the following Australian Standards (AS):

- AS 2688:2017
- AS 1170.0:2002
- AS 1170.2:2011 (Zone D)

Construction and installation of the fixed Window Security screen complies with the following AS:

- AS 5039-2008
- AS 5040-2003

OPTIONAL EXTRAS

- Pre-hanging in pressed steel split frame
- Hardware preparation performed in controlled environment of factory
- Supply of closers and seals



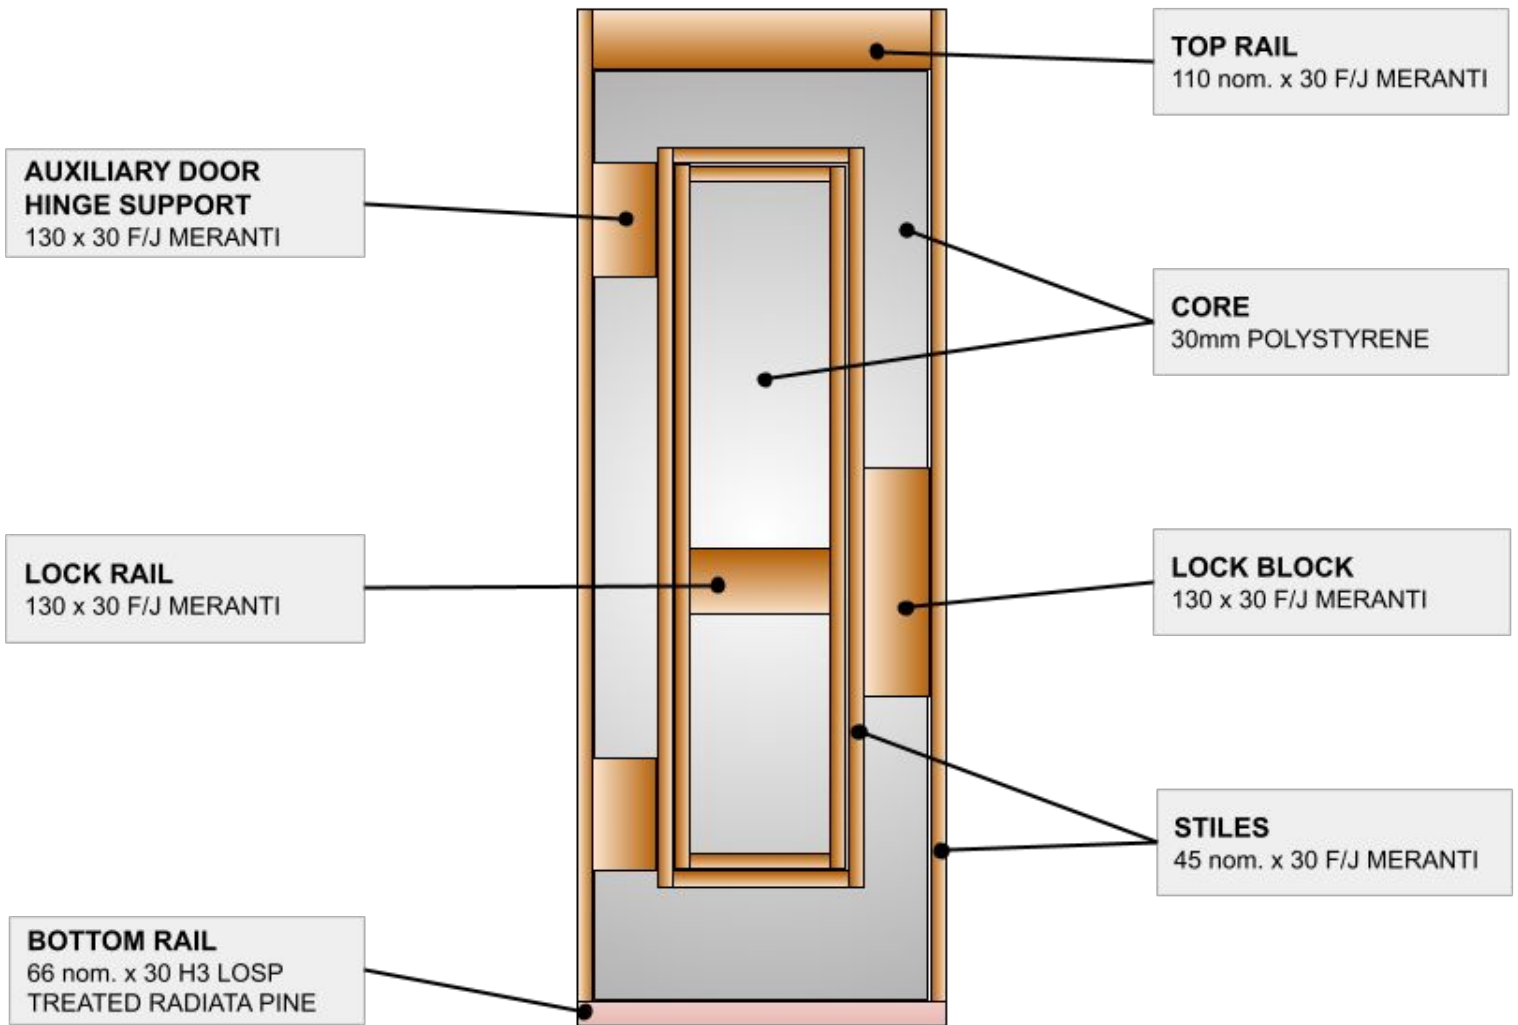
(above) Secure Door in Door installed in pressed steel split frame with RFID mortise lockset.

Solwest Doors

2 Conquest Way, Wangara WA 6056
(08) 9309 3899

Email: sales@solwest.com.au

Web: www.solwest.com.au

SECURE DOOR-IN-DOOR - 40MM

View with facings removed. Facing to be 4mm Plywood clad with 0.55mm Colorbond®

Solwest Doors

2/101 Windsor Road, Wangara WA 6056
(08) 9309 3899

Email: sales@solwest.com.au

Web: www.solwest.com.au